



KONGERIKET NORGE
The Kingdom of Norway

10/535360
PCT/EP03/13044

EPO - DG 1

18 02 2004

(44)

REC'D 12 MAR 2004

WIPO

PCT

Bekreftelse på patentsøknad nr
Certification of patent application no

2002 5536

➤ Det bekreftes herved at vedheftede dokument er nøyaktig utskrift/kopi av ovennevnte søknad, som opprinnelig inngitt 2002.11.18

➤ *It is hereby certified that the annexed document is a true copy of the above-mentioned application, as originally filed on 2002.11.18*

2003.12.02

Line Reum

Line Reum
Saksbehandler

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



Applicant: Norsk Hydro ASA
N-0240 Oslo

Attorney: Svein Hofseth
Norsk Hydro ASA
N-0240 Oslo

Inventors: Henry Petersen
Burgstrasse 9
D-24939 Flensburg
Germany

Søren B. Olsen
Margarethenstrasse 10,3
D-24939 Flensburg
Germany

Karl Brian Nielsen
Trekanten 8
DK-9270 Klarup
Denmark

Title: "A flexible, tubular device e.g. a bellows"

P02058

ld

TENTSTYRET
02-11-18*20025536

Søker: Norsk Hydro ASA
N-0240 Oslo

Fullmektig: Svein Hofseth
Norsk Hydro ASA
N-0240 Oslo

Oppfinnere: Henry Petersen
Burgstrasse 9
D-24939 Flensburg
Tyskland

Søren B. Olsen
Margarethenstrasse 10, 3
D-24939 Flensburg
Tyskland

Karl Brian Nielsen
Trekanten 8
DK-9270 Klarup
Danmark

Tittel: "Fleksibel røranordning, f.eks. en rørbelg"

P02058

A flexible, tubular device e.g. a bellows

The present invention relates to a flexible, tubular device with an internal diameter up to 60 millimeters, said device comprising one or more corrugated convolutions, said convolutions having an overall bell-like shape with rounded top portions and rounded bottom portions. The invention further relates to a use of such a device.

Flexible, tubular devices such as bellows with one or more convolutions impart a degree of flexibility in pipelines carrying gas, air, water, steam, petrochemicals or any other substance at varying temperatures and pressures. Turbines, pumps, compressors, heat exchangers, reactors and valves are typical types of equipment where bellows can be used to absorb relative movements between the equipment and the connecting pipelines. Unless some compensation for these dimensional changes is provided, high stresses will be induced in the equipment or the piping and might lead to system failure. The inherent flexibility enables bellows to absorb movements in more than one direction and, thereby, leaves a greater degree of freedom in designing the layout of the piping system, compared to using conventional devices such as bends and loops.

In general, a bellows can be applied to four basic movement modes (or a combination of these): axial, angular, lateral, and torsional. The torsional mode is, however, often unwanted because it destabilises the convolution in a way that reduces its ability to absorb other modes. The bellow durability depends greatly on the geometry, the material properties, the manufacturing processes during production, and the boundary and load conditions, e.g. an unrestrained pressurised bellow will expand longitudinally, whereas an axially constrained bellow will restrain pressure thrust from the system without changing its dimensional length. The lifetime of each convolution depends, therefore, on a variety of factors but, in particular, on the ability to absorb movements while having geometry that avoids local peak loads.

The convolution geometry is often based on sound engineering principles and years of experience. This know-how is then used to design a bellows that may be required to withstand exposure to large variations in ambient temperature and pressure, e.g. during equipment start-up, one-time stretching under assembly or numerous movements when in operation. Designing a bellows for a piping system often requires, therefore, a thorough system response examination in order to avoid unfavourable conditions that can later lead to bellow failure.

Within the industry, it is commonly accepted that the leading cause of failure for bellows is due to fatigue or one-time damage during installation. In both cases the bellow is stressed beyond a characteristic threshold value, which leads to failure. A way to resolve this failure type, and thereby increase product liability, is to reduce the stresses during deformation by providing improved convolution geometry. The bellow geometry depends on the number of convolutions, as well as on the total length, skirt length, wall thickness and inner diameter. The convolution geometry depends on convolution height, pitch and wall thickness. These are the common design variables, which can be adjusted for a specific application through empirically based safety factors and years of experience. Often the design is based on modifications of a "U" span, "S" span, "V" span, or " Ω " span, from where engineering design data and safety factors are generated. These shapes are "built-up" from simple geometric shapes (primitives) like straight lines and circle sectors, which are easy to draw, analyse and easily programmable into a CNC interface before cutting metal for the forming tools. When such a convolution shape, combined with a material, which is often stainless steel, and a manufacturing process, fulfils customer requirements and expectations, the design may become the best practise within a specific area, even without being the best solution.

The susceptibility of the convolution to fatigue failure is, therefore, increased by geometric stress raisers that are more predominant than wall thickness variations such as material thinning in the convolution nose-tip area as a re-

sult of the forming process. For this reason, the bellow failure modes have resulted in the production of bellows in expensive high-grade materials, e.g. stainless steel, which allow a poor convolution design to offer an acceptable performance durability.

5

A bellow may be required to withstand a very large number of load cycles, such as those from a running engine. The cyclic stress range controls the overall fatigue life of the bellow and if the engine goes through several start-up and shut-down phases, the stress range will control the cumulative fatigue life. In both cases the fatigue life depends on the total number of completed cycles and upon the mean stress and total stress range to which the bellow is subjected. With a decreased amount of stress, a bellows will withstand a greatly increased number of repetitions before failure, whereas at a higher stress level, failure will occur after a relatively fewer number of reversals.

15

When bellows need to be specially designed for a high cyclic life, the literature is scarce in specifying characteristic design variables or dimensional ranges for an optimal convolution shape. In these cases, the bellow manufacturer must be advised of the expected number of cycles and, based on empirical generated design data from historical successful designs in connection with estimated material and manufacturing constants, a safe convolution design might emerge. The literature is, in addition, limited with regard to estimating fatigue data for calculating the lifetime of current standard spans, e.g. the data varies greatly when the pitch-height convolution ratio varies.

25

Guidance on design of bellows etc. may e.g. be found in "Standards of the Expansion Joint Manufacturers Association, Inc.", 25 North Broadway, Tarrytown, New York 10591.

30

One object of the present invention is to provide an improved design of a flexible device such as a bellows, for obtaining increased life span and/or obtaining the option of using alternative materials, compared to the known

4 designs. Another object is to provide the option of using less costly materials and/or lighter materials.

5 The novel and inventive aspects of the device according to the invention involve that the curvature of the outside surface of the convolutions is numerically smaller at the top portions than at the bottom portions, said curvature being derived from a curve defined as the intersection of the outside surface of the device and a plane through the longitudinal axis of the device, as well as they involve the curvature of said curve changes sign only once at a
10 change position located between a top portion and an adjacent bottom portion, and that the length of a first section on the curve is at least 10% longer than the length of a second section on the curve, said first section extending from one change position to an adjacent change position via a top portion, and said second section extending from one change position to an adjacent
15 change position via a bottom portion.

All geometrical transitions and bends result in stress raisers and a design must be obtained where the magnitude of such unavoidable present stress raisers is reduced. Compared to the standard U-shaped convolution, the in-
20 creased flexibility is achieved by making higher convolutions, without significantly increasing the convolution width. At the same time, having a smaller curvature in the top portion, thereby reducing the stress raisers for this region, reduces the total stress level during deformation of the convolution. The design with a curve having a curvature, which changes sign only once at
25 a change position located between a top portion and an adjacent bottom portion, provides a smooth transition between the top and bottom portions. To minimize the stress level by the top portion, the length of the first section on the curve is at least 10% longer than the length of the second section on the curve, both sections extending from the locations where the curvature
30 changes sign. In this way the locations, where the curvature changes sign, are shifted towards the bottom portions and thus provide a design with narrow bottom portions and wider, smooth top portions, which significantly reduces the overall stress level. This provides an improved design of the flexi-

ble device whereby increased life span is obtained. Also, the improved design provides options to use alternative materials, compared to the known designs, e.g. aluminium instead of stainless steel. In this way, less costly materials and/or lighter materials may also be used.

5

In another embodiment the length of a first section on the curve may be at least 50% longer than the length of a second section on the curve, said first section extending from one change position to an adjacent change position via a top portion, and said second section extending from one change position to an adjacent change position via a bottom portion. This gives further priority to the shape at the top portions and further reduces the overall stress level.

In a further embodiment the curvature of the convolutions may numerically be at least 20% smaller by the top portions than by the bottom portions, which results in a reduction of the overall stress level.

The pitch-height ratio(q) may in preferred embodiments be between 0.7 and 1.0.

20

In yet a further embodiment the curve between a bottom portion and an adjacent bottom section may have one global optimum placed at the top portion and two global minima, said minima being placed by the bottom portions, and the curvature by the global maximum of the curve may have a local minimum. This provides an improved shape with significantly reduced effect of the present stress raisers, and a high degree of utilization of the material.

25

In a still further embodiment the curve may preferably be continuous and at least two times differentiable. This provides a smooth shape without abrupt geometrical changes.

30

In a preferred embodiment a section of the curve, corresponding to one convolution from one bottom portion to an adjacent bottom portion, may be

symmetric about an axis perpendicular to the longitudinal axis and through the global optimum within the top portion.

5 In another preferred embodiment the majority of the convolutions may be substantially identical.

10 In a further preferred embodiment the device may be made of an extruded metal alloy pipe and the convolutions may be formed in a deep drawing process such as elastomeric forming or hydro forming.

In yet a further preferred embodiment the metal alloy may be stainless steel or an aluminium alloy.

15 The device may be used for flexible coupling of pipes or tubes in a vehicle, e.g. a car, preferably for the coupling of pipes or tubes in the air-condition system. It may have a number of other uses, such as in a charge air cooling system etc.

20 In the following the invention is described with reference to the drawings, which display examples of embodiments of the invention.

Fig. 1 shows part of a cross section of a flexible, tubular device, said cross section being taken along a plane through the longitudinal axis of the device.

25 Fig. 2 shows a curve defined as the intersection of the outside surface of a flexible, tubular device and a plane through the longitudinal axis of the device.

30 Fig. 3 shows a curve defined as the intersection of the outside surface of a flexible, tubular device, according to prior art, and a plane through the longitudinal axis of the device.

Fig. 4-5 show curves each defined as the intersection of the outside surface of a flexible, tubular device according to the state of the art and a plane through the longitudinal axis of the device.

Fig. 1 displays a flexible, tubular device comprising a number of convolutions 2. The outside surface of the device is indicated by reference number 4. The pitch and the height of the convolutions are indicated by the references q and w . The longitudinal axis of the device is indicated by the reference number 8.

The height w is determined by the maximum material elongation before necking occurs. Necking is the phenomena that the wall thickness locally becomes very thin, and thereby result in a risk of cracking of the material, during a deep drawing process, e.g. elastomeric forming.

Fig. 2 displays a curve 6 with rounded top portion T and rounded bottom portions B and B'. The top portion T is located by the global optimum of the curve 6. The bottom portions B, B' are located by the global minima of the curve 6. The curvature of the top portion T is smaller than the curvature of the bottom portions B, B'. A line 10 is indicated where the curvature is approx. zero/null. This is further indicated by the change positions P and P'. The section 7 extends from the change position P via the top portion T to the change position P'. The section 7 is longer than a section 9 which extends from a change position P via a bottom portion B, B' to a change position P'.

The convolutions may be placed perpendicular to the longitudinal axis 8 of the device or they may be formed as a helix along the longitudinal axis.

25

Fig. 3 displays a curve 22 indicating a pure U-shape of the convolutions. The curve 22 is constructed merely by primitives, straight lines 16 and circular arcs 14. This design involves serious stress raisers at the locations 18 and 20. This may simply be verified e.g. by a FE analysis using commercially available software such as e.g. Cosmos® or Ansys®.

30

Fig. 4 displays a curve 24 indicating a pure U-shape of the convolutions. The measurements are used for reference tests, Ref A (Fig. 4) and Ref B (Fig. 5),

according to table 2 below. Fig. 5 displays a curve 26, also indicating a pure U-shape. The designs of Fig. 4 and 5 are believed to be the industry state of the art and are provided by the company RANFLEX India Pvt. Ltd. of India. The design of Ref A is the result of several manufacturing trials based on years of experience. The design of Ref B is also based on years of experience in manufacturing bellows, but has not been manufactured yet, which means that the actual final design may change a few tenths of a millimetre (1/10 mm). This will however not significantly change the result outlined in table 2. For informative reasons it must be underlined that manufacturing the shapes depicted in the examples as well as the shapes according to Fig. 4 and 5 takes state of the art manufacturing tools and skills. It is e.g. necessary to make sure that an adequate amount of material is available in order to avoid over-stretching of the material, which causes cracking.


15 **Examples**

In the following, a number of examples of designs according to the present invention are shown. Table 1 displays the internal diameters, wall thicknesses and material for the examples. In each example the design of one convolution is given, as well as the corresponding curvature relating to the design. The design and curvature are presented as a series of points, which are to be understood as points on a smooth curve through said points, said



curve not being depicted. In each example the design of the convolutions is presented by circular marks whereas the curvature is presented as triangular marks. The horizontal axis displays the width of a convolution from one side to another, starting at a bottom portion B, see Fig. 2, and ending at a bottom portion B' via one top portion T. The vertical axis on the left side depicts the height. Both height and width are in millimeters. The vertical axis on the right side depicts the curvature and the units are 1/mm (inverse millimeters).



Example	Internal diameter [mm]	Wall thickness [mm]	Material
1	8	0.5	AA5454
2	8	0.5	AA5049
3	17	0.5	AA5049
4	17	0.5	AISI 316L
5	25.4	1.0	AA5049
6	38.1	1.0	AA5049
7	50.8	1.0	AA5049



Table 1.

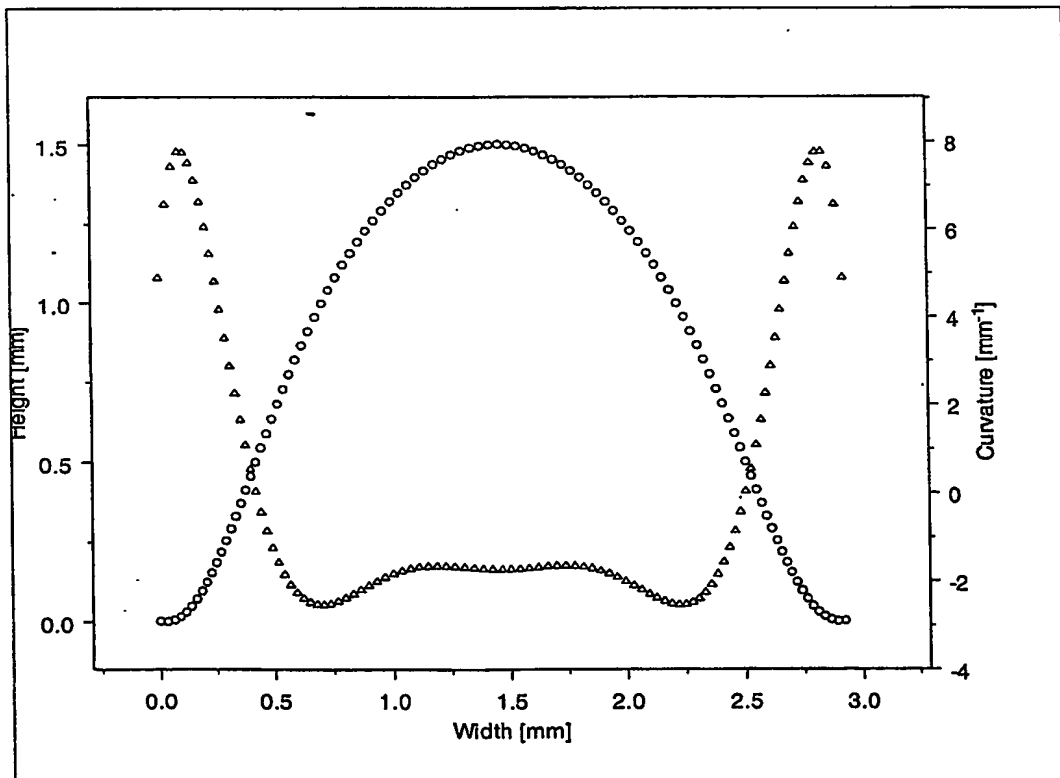

Example 1.

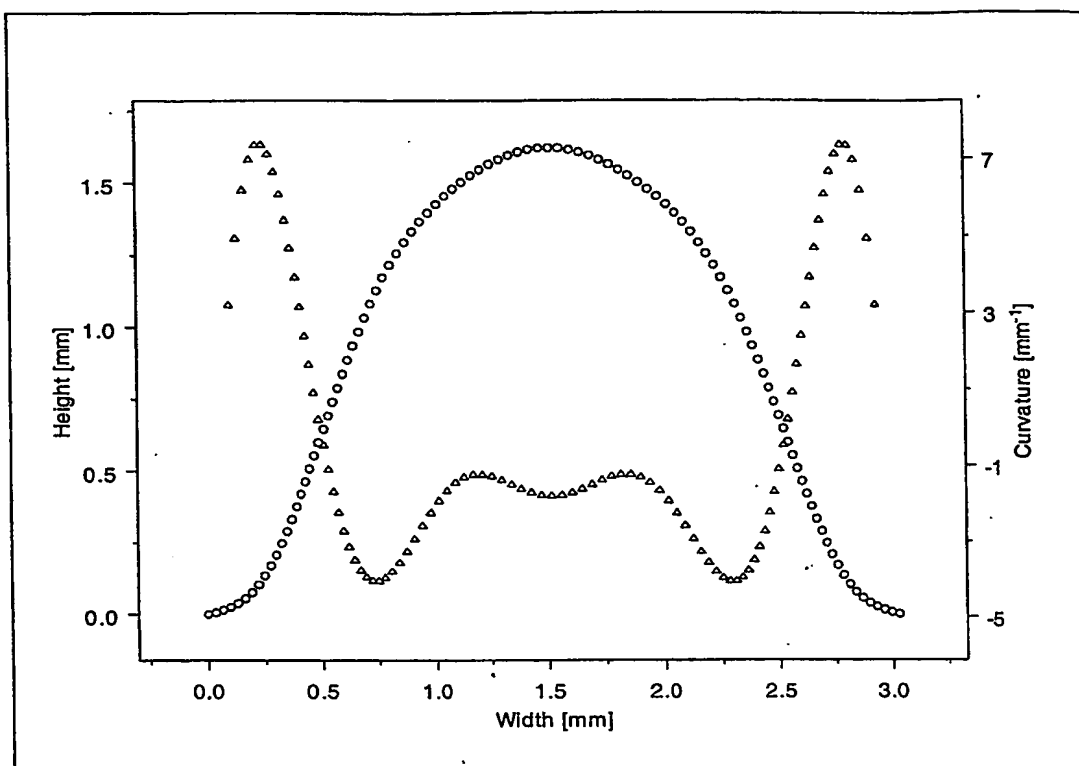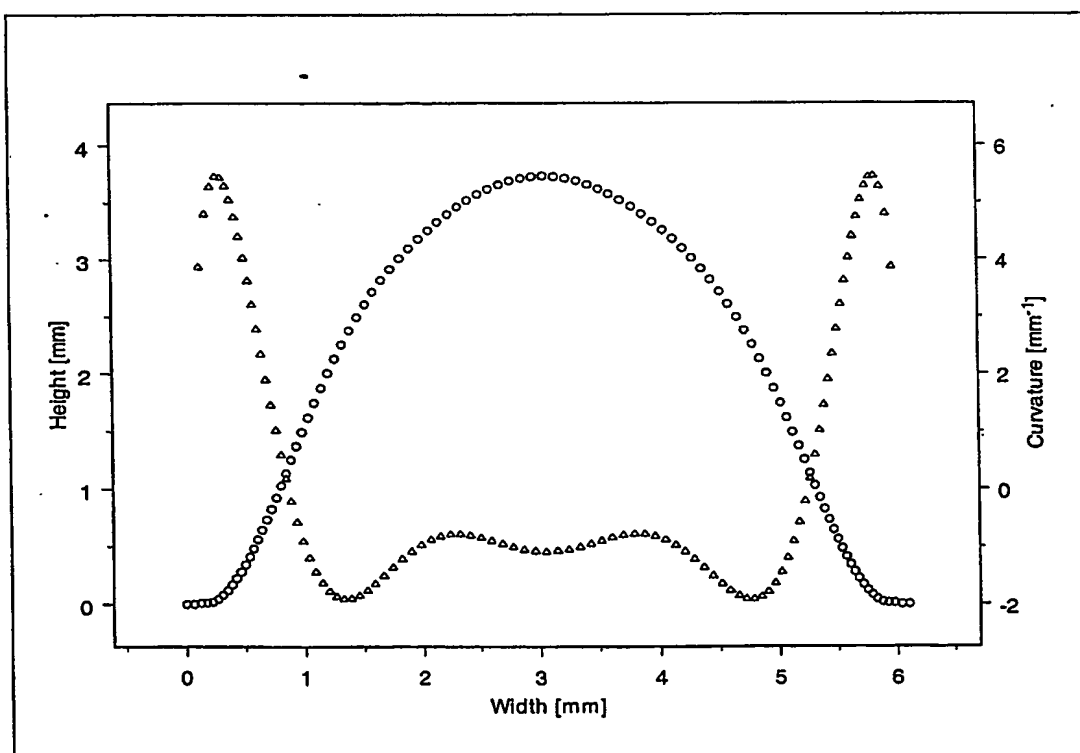*Example 2.**Example 3.*

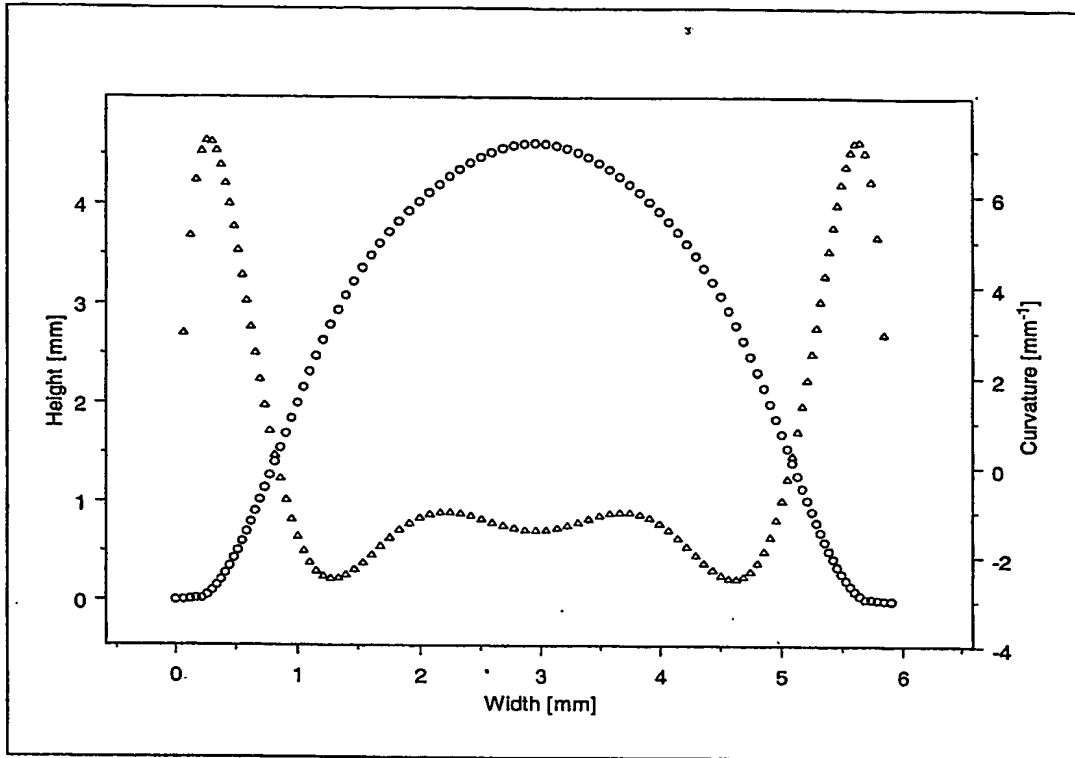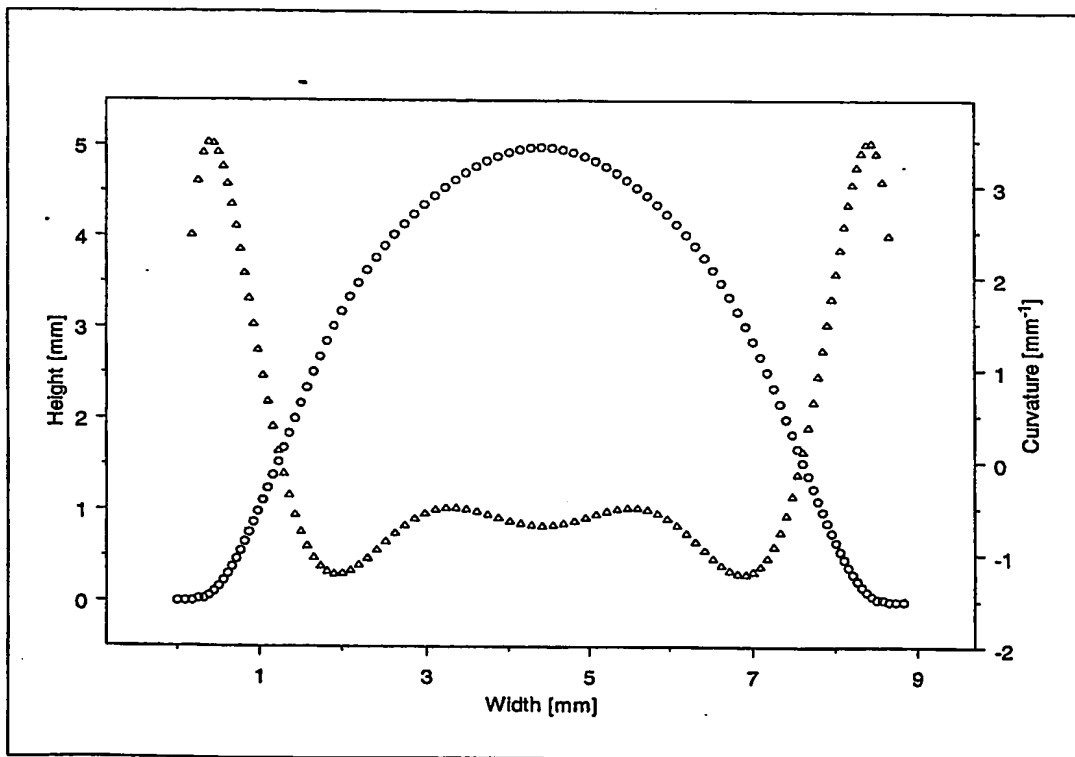*Example 4.**Example 5.*

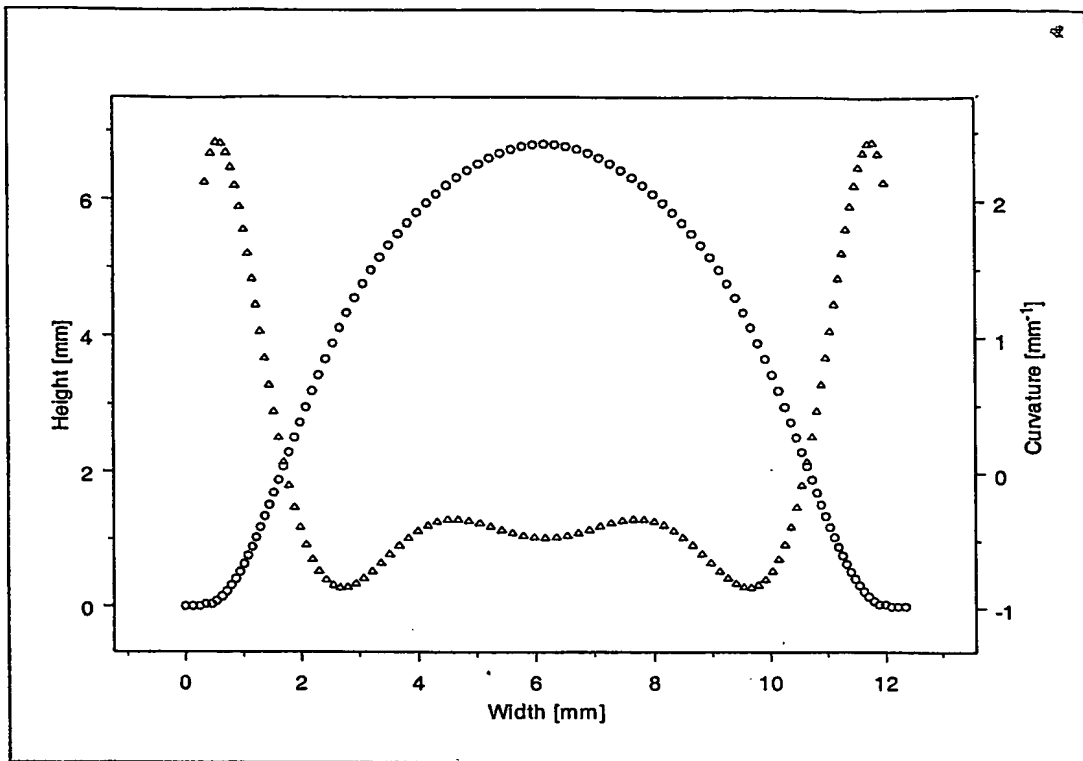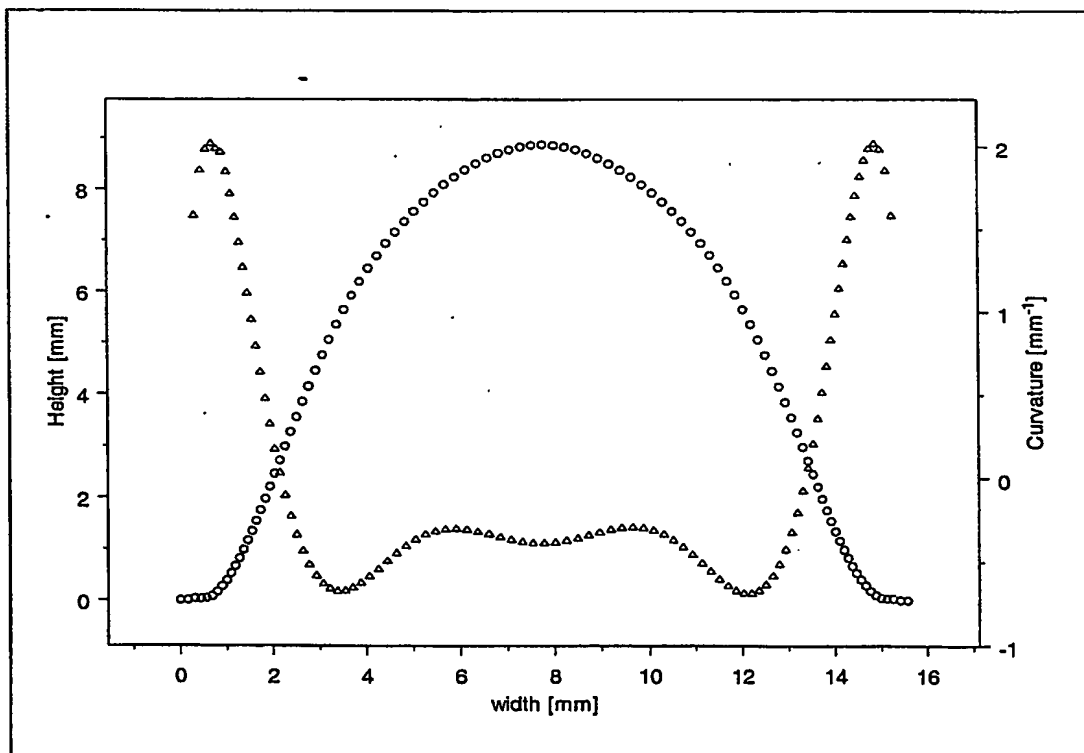*Example 6.**Example 7.*

It may be noted that although example 3 and 4 are similar in shape, the height of the convolution in example 4 is larger. This is due to the difference in material properties between stainless steel and the aluminum alloy.

Example	q [mm]	w [mm]	$\frac{q}{2w}$	Flex [mm]
1	2.92	1.50	0.97	0.10
2	3.03	1.62	0.94	0.15
<i>Ref A</i>	5.30	3.65	0.73	0.10
3	6.10	3.72	0.82	0.32
4	5.91	4.61	0.64	0.73
5	8.83	4.96	0.89	0.64
6	12.34	6.78	0.91	0.97
<i>Ref B</i>	12.90	8.60	0.75	0.52
7	15.56	8.84	0.88	1.35

Table 2.

The column in table 2 marked "Flex" displays the flexibility of one convolution, said flexibility is expressed as the total deflection when one end at a bottom portion B (Fig.2) is fixed and the other end at bottom portion B' is displaced between a first situation, just before yielding takes place in compression to a second situation, just before yielding takes place in tension. The displacement is parallel to the longitudinal axis 8, Fig.2, of the device. In the first situation B' is nearer B (compression) than in the second situation (tension). The flexibilities are found by FE analysis taking material and manufacturing (thinning etc.) parameters into consideration and represent close approximations to factual behavior of manufactured flexible devices.

Also, in table 2 two references, Ref A and Ref B, are displayed. For Ref A the material and wall thickness are the same as in example 3, i.e. AA 5049 and 0.5 millimeters, but the design is a pure U-shape corresponding to Fig. 4. An improvement from a flexibility of 0.10 millimeters to 0.32 millimeters constitutes a 200% improvement, although q and w are relatively equal. For Ref B the material and wall thickness are the same as example 7, i.e. AA

5049 and 1.0 millimeters, but the design is a pure U-shape corresponding to Fig. 5. An improvement from a flexibility of 0.52 millimeters to 1.35 millimeters constitutes a near 200% improvement, although q and w also here are relatively equal.

5

In this document the term "radius of curvature" is to be understood as the radius of a circle that touches a curve in a point on its concave side and is of such a size that the circle and the curve have common tangents to both sides of said point.

10

The term "curvature" is to be understood as the inverse radius of curvature.

In practice, radius of curvature and curvature may be found for both concave and convex surfaces. Utilizing high-resolution optical measuring techniques, objective data could be generated for determining the radius of curvature and the curvature of surfaces on a manufactured convolution. The data may also be used to determine whether any arbitrary convolution found on the market is in conflict with the scope of protection. To date, such systems easily generate 12-bit resolution scanning with a measuring point distance down to a hundredth of a millimeter. This data can then be used for further analysis with standard CAD software or mathematical analysis software such as Mathcad®.

15
20

The pitch-height ratio is defined as the pitch q divided by two times the height w , i.e. $(q/2w)$.

25

It is to be understood that the invention as disclosed in the description and in the figures may be modified and changed and still be within the scope of the invention as claimed hereinafter.

30



Claims

1. A flexible, tubular device e.g. a bellows with an internal diameter up to 60 millimeters, said device comprising one or more corrugated convolutions(2),
5 said convolutions having an overall bell-like shape with rounded top portions(T) and rounded bottom portions(B,B'), **characterised in** that the curvature of the outside surface of the convolutions(2) is numerically smaller at the top portions(T) than at the bottom portions(B,B'), said curvature being derived from a curve(6) defined as the intersection of the outside surface(4) of
10 the device and a plane through the longitudinal axis(8) of the device, and in that the curvature of said curve changes sign only once at a change position(P,P') located between a top portion(T) and an adjacent bottom portion(B,B'), and in that the length of a first section(7) on the curve(6) is at least 10% longer than the length of a second section(9) on the curve, said
15 first section(7) extending from one change position(P) to an adjacent change position(P') via a top portion(T), and said second section(9) extending from one change position(P) to an adjacent change position(P') via a bottom portion(B,B').
- 20 2. A device according to claim 1, **characterised in** that the length of a first section(7) on the curve(6) is at least 50% longer than the length of a second section(9) on the curve, said first section(7) extending from one change position(P) to an adjacent change position(P') via a top portion(T), and said second section(9) extending from one change position(P) to an adjacent change
25 position(P') via a bottom portion(B,B').
3. A device according to claim 1 or 2, **characterised in** that the curvature of the convolutions is numerically at least 20% smaller by the top portions(T) than by the bottom portions(B,B').
30
4. A device according to one or more of claims 1-3, **characterised in** that the pitch-height ratio(q) is between 0.7 and 1.0.

5. A device according to one or more of claims 1-4, **characterised in** that the curve(6) between a bottom portion(B,B') and an adjacent bottom section(B',B) has one global optimum placed at the top portion(T) and two global minima, said minima being placed by the bottom portions(B,B'), and in that the curvature by the global maximum of the curve(6) has a local minimum.
6. A device according to one or more of claims 1-5, **characterised in** that the curve(6) is continuous and at least two times differentiable.
7. A device according to one or more of claims 1-6, **characterised in** that a section of the curve(6) corresponding to one convolution from one bottom portion(B) to an adjacent bottom portion(B') is symmetric about an axis perpendicular to the longitudinal axis(8) and through the global optimum within the top portion(T).
8. A device according to one or more of claims 1-7, **characterised in** that the majority of the convolutions are substantially identical.
9. A device according to one or more of claims 1-8, **characterised in** that the device is made of an extruded metal alloy pipe and in that the convolutions are formed in a deep drawing process such as elastomeric forming or hydro forming.
10. A device according to claim 9, **characterised in** that the metal alloy is stainless steel or an aluminium alloy.
11. Use of a device according to one or more of the preceding claims for flexible coupling of pipes or tubes in a vehicle, e.g. a car.
12. Use according to claim 11 for the coupling of pipes or tubes in the air-condition system in a car.




Abstract

A flexible, tubular device e.g. a bellows




5 The present invention concerns a flexible, tubular device e.g. a bellows with an internal diameter up to 60 millimeters, said device comprising one or more corrugated convolutions(2), said convolutions having an overall bell-like shape with rounded top portions(T) and rounded bottom portions(B,B'). The novel aspects involve that the curvature of the outside surface of the convo-
10 lutions(2) is numerically smaller at the top portions(T) than at the bottom portions(B,B'), said curvature being derived from a curve(6) defined as the intersection of the outside surface(4) of the device and a plane through the longitudinal axis(8) of the device, as well as they involve that the curvature of said curve changes sign only once at a change position(P,P') located between a
15 top portion(T) and an adjacent bottom portion(B,B''), and that the length of a first section(7) on the curve(6) is at least 10% longer than the length of a second section(9) on the curve, said first section(7) extending from one change position(P) to an adjacent change position(P') via a top portion(T), and said second section(9) extending from one change position(P) to an ad-
20 jacent change position(P') via a bottom portion(B,B'). This provides an improved design with increased durability due to increased flexibility at lower stresses, compared to the prior art.

(Fig. 2)

25



1/2

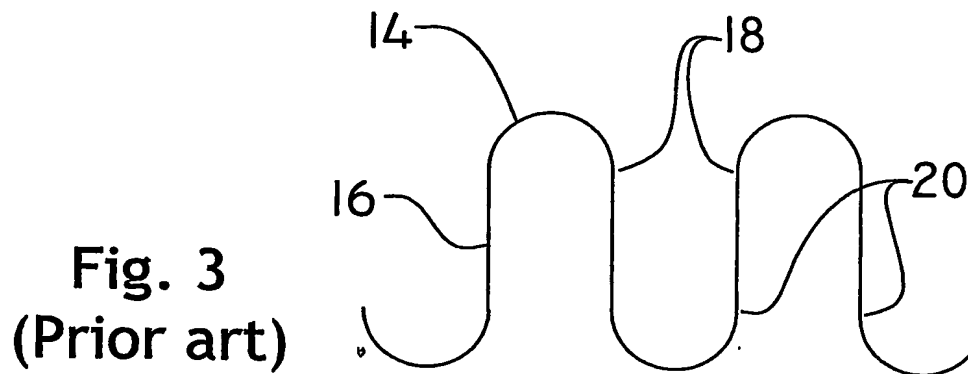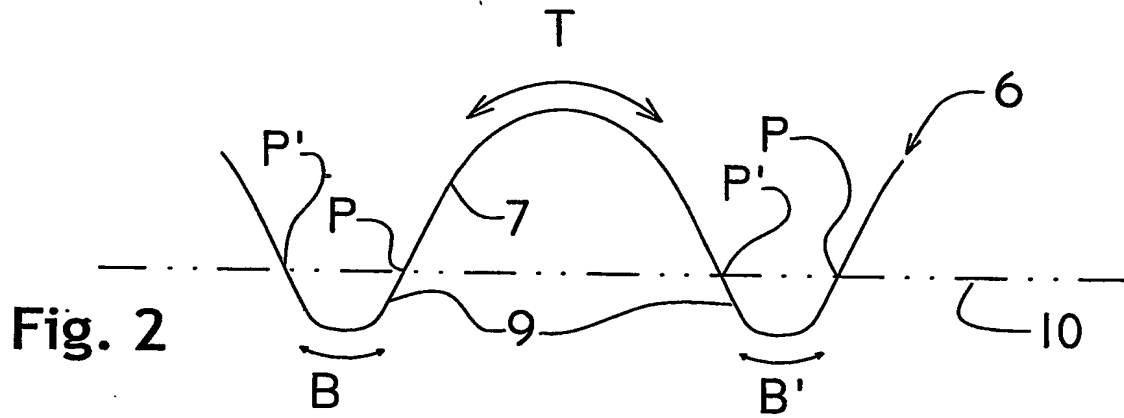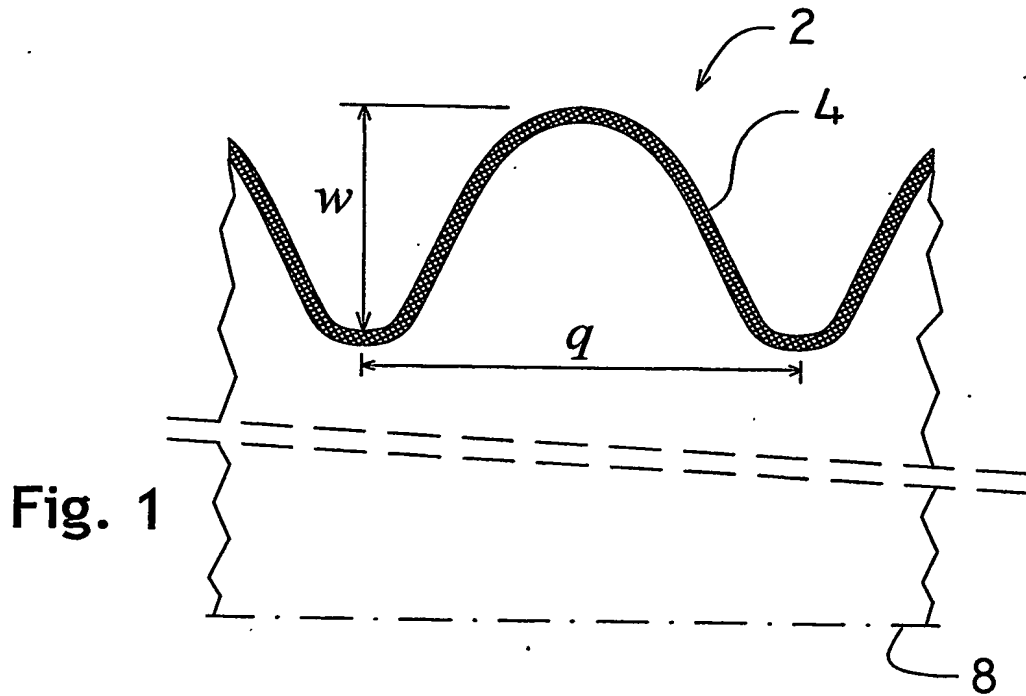

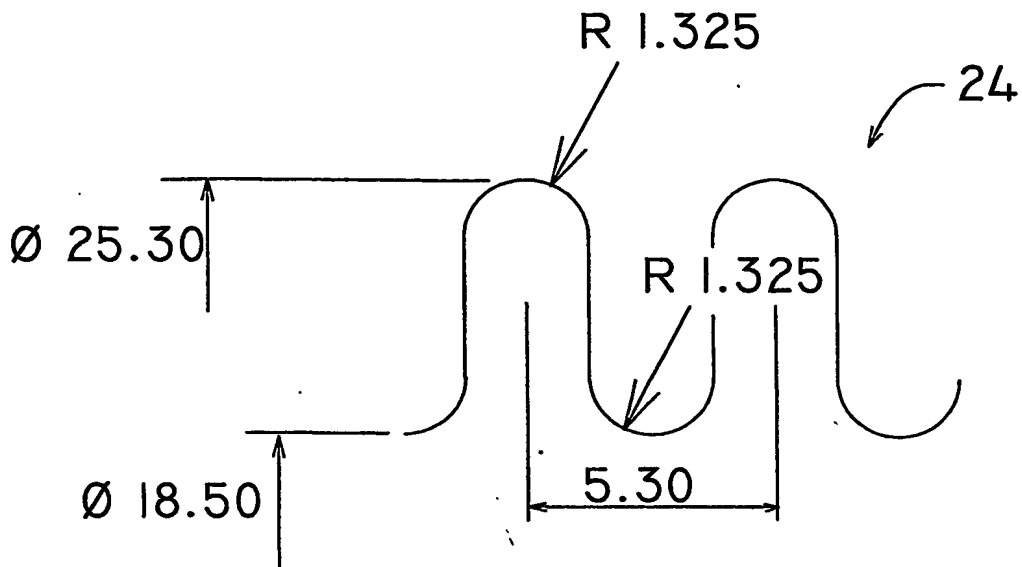


Fig. 4

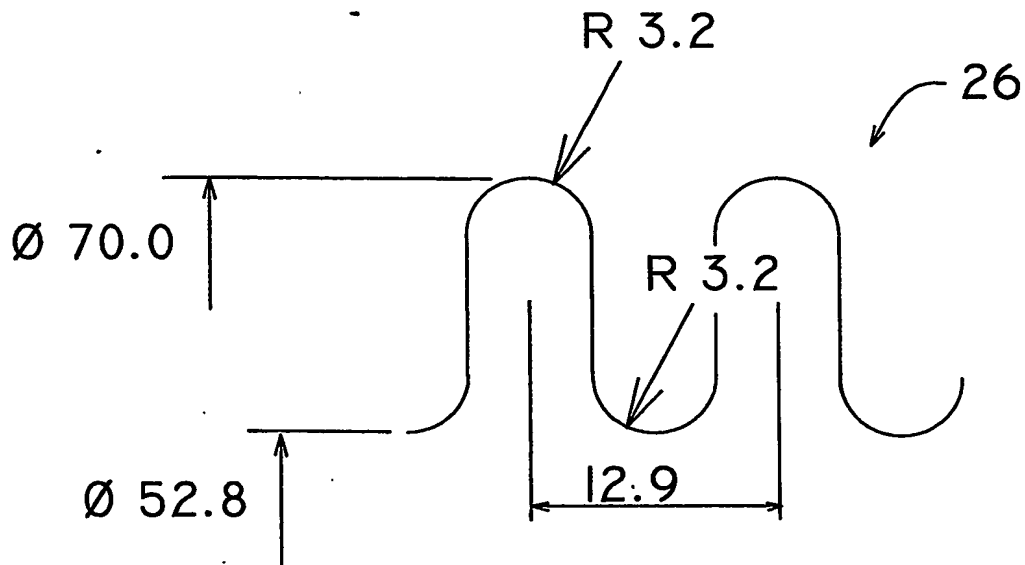


Fig. 5

